


## Flexible Design Armored Optical Fiber Cable 2 Core Bow Type Drop Cable

Our Product Introduction

for more products please visit us on [optical-fibercables.com](http://optical-fibercables.com)

### Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: ISO, UL, CE, RoHS
- Model Number: FTTH-AB2-G7-L-BK-1KM
- Minimum Order Quantity: 1-2km
- Price: Negotiable
- Packaging Details: Wooden Drum
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 1000 Pieces

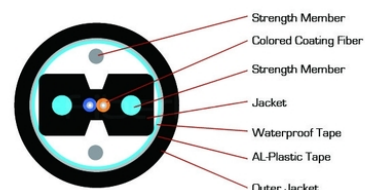

### Product Specification

- Name: Armored Optical Fiber Cable
- Core: 2 Core
- Fiber Type: G657A1/G657A2/G652D
- Cable Structure: Round
- Color: Black/White/Customized
- Applications: Communication
- Cable Length: Customized
- Jacket Material: Black Polyethylene (PE)
- Fiber Brand: Yofc/Ofs/Corning
- Operating Temperature: -20°C~+70°C
- Storage Temperature: -40°C~+80°C
- Highlight: **Armored Optical Fiber Cable 2 Core, 2 Core Bow Type Drop Cable**



### More Images



## Product Description

### FTTH Armor Bow-type Drop Cable

FTTH Armor Bow type Drop Cable is a fiber optic cable designed for indoor and outdoor use, particularly suitable for FTTH (Fiber to the Home) networks. This armored fiber optic cable has multiple characteristics, including colorer coating fibers, reinforced members, inner sheath, messenger, waterproof tape, AL plastic tape, and outer jacket and armor. According to the type of fiber, it can support single-mode (SM) or multi-mode (MM) fibers, such as G652, G657, etc. The internal structure of Bow type Drop Cable includes FRP, steel wire or other high-strength members, as well as the use of polyethylene (PE) or other materials as sheath materials. Bow type Drop Cable has a wide range of applications, including but not limited to connecting indoor and outdoor communication networks. Its design and material selection ensure its durability and reliability, and can meet the needs of various environmental conditions.

we manufactures a wide range of cables from 2-144 fibers with a variety of designs to meet the demands of most installation conditions. Only the highest quality materials are used in our fiber optic cables to ensure that the cable strength and optical integrity are not compromised. Rugged jacket materials and the addition of armor provide the right level of protection.

### Features

1. Special low-bend-sensitivity fiber provides high bandwidth and excellent communication transmission property.
2. good performance of crush resistance to protect the fiber.
3. Two parallel FRP/ steel strength members ensure good performance of crush resistance to protect the fiber.
4. Lightweight and flexible design, easy and quick installation
5. Low smoke, zero-halogen and flame retardant sheath, environment-friendly, good safe.

### Application

1. High-performance optical network operating
2. High-speed optical routes in buildings (FTTH)
3. Suitable as cable extending from outdoor (as aerial cable) to indoor
4. Industrial application

### Specification

Cable Parameter			
Item		Specification	
Fiber Count		2	4
Sub-unit Jacket	Material	LSZH	
	Thickness	0.4mm±0.05mm	
	OD	2.0mm±0.2mm	
Armored Layer	Material	SUS204	
	OD	4.8mm±0.3mm	6.0mm±0.3mm
	Thickness	0.4mm±0.05mm	
	Gap	0.3mm±0.10mm	
Strength Member		Aramid Yarn	
Outer Jacket	Material	LSZH	
	Color	Black	
	Thickness	0.9mm±0.1mm	1.1mm±0.1mm
	OD	7.0mm±0.3mm	7.5mm±0.1mm 8.0mm±0.1mm

Mechanical and Environmental Characteristics			
Item		Specification	
Fiber Count		2	4
Tension Resistance (N)	Long Term	≥ 600	≥ 800
	Short Term	≥ 1000	≥ 1200
Crush Resistance (N/10cm)		≥ 3000	
Nominal Weight (kg/km)		65	85
Operating Temperature ( °C)		-40 ~ +80	
Storage Temperature ( °C)		-40 ~ +80	

Fiber Parameters					
Single Mode					
Item		Unit	G652D	G657A1	G657A2
Mode Field Diameter	1310nm	μm	9.1±0.4	8.8±0.4	8.8±0.4
	1550nm	μm	10.4±0.5	9.8±0.5	9.8±0.5
Cladding Diameter		μm	125±1	125±0.7	125±0.7
Cladding Non-circularity		%	≤ 1	≤ 0.7	≤ 0.7
Core-cladding Concentricity Error		μm	≤ 0.6	≤ 0.5	≤ 0.5
Coating Diameter		μm	245±7	245±5	245±5
Coating Non-circularity		%	≤ 6.0	≤ 6.0	≤ 6.0
Cladding-coating Concentricity Error		μm	≤ 12.0	≤ 12.0	≤ 12.0
Cable Cutoff Wavelength		nm	≤ 1260	≤ 1260	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤ 0.4	≤ 0.4	≤ 0.4
	1550nm	dB/km	≤ 0.3	≤ 0.3	≤ 0.3

Multimode

Item		Unit	62.5/125	50/125	OM3-150	OM3-300	OM4
Core Diameter		μm	62.5±2.5	50±2.5	50±2.5	50±2.5	50±2.5
Cladding Diameter		μm	125±1.0	125±1.0	125±1.0	125±1.0	125±1.0
Core Non-circularity		%	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0
Cladding Non-circularity		%	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Core-cladding Concentricity Error		μm	≤ 1.5	≤ 1.5	≤ 1.0	≤ 1.0	≤ 1.0
Coating Diameter		μm	245±7	245±7	245±7	245±7	245±7
Coating Non-circularity		%	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0
Cladding-coating Concentricity		μm	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0
OFL Bandwidth	850nm	MHz·km	≥ 160	≥ 500	≥ 700	≥ 1500	≥ 3500
	1310nm	MHz·km	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500
Attenuation Coefficient	850nm	dB/km	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0
	1310nm	dB/km	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0



#### FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?



A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116