


Data Center Multi Fiber Optic Cable 12 Core Mini Round Indoor Optical Fiber Cable

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: ISO, UL, CE, RoHS
- Model Number: FOCI-M12-G2-C-AQ-1KM
- Minimum Order Quantity: 1-2km
- Price: Negotiable
- Packaging Details: Wooden Drum
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 1000 Pieces

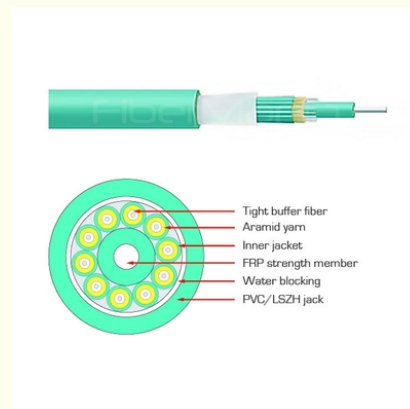

Product Specification

- Name: Multi Fiber Optic Cable
- Core: 12 Core
- Fiber Type: Multimode OM3
- Cable Structure: Round
- Jacket Material: OFNR
- Applications: Base Station
- Cable Length: Customized
- Fiber Brand: Yofc/Ofs/Corning
- Operating Temperature: -40°C~+80°C
- Highlight: **Data Center Multi Fiber Optic Cable, Multi Fiber Optic Cable 12 Core, Round Indoor Optical Fiber Cable**

Product Description

Multi-fiber Mini Round Indoor Cable

Multi-fiber Mini Round Indoor Cable is a fiber optic cable designed for use in indoor environments, it has a small outer diameter and highly integrated characteristics, the multi-core fiber can be integrated in a small size circular sheath. This cable is commonly used in data centers, indoor cabling, local area networks and connections between devices.

we manufactures a wide range of fiber optic cables in a variety of designs, according to customer requirements to meet most installation conditions. Only the highest quality materials are used in our fiber optic cables to ensure that the cable strength and optical integrity are not compromised. Rugged jacket materials and the addition of armor provide the right level of protection.

Features

1. Compact structure and high integration
2. Easy to install because of its flexibility and small bending radius
3. Soft, flexible, easy to splice, and with big capacity data transmission
4. Various Jacket options: PVC, LSZH, TPU

Application

1. Long-distance communication, LAN
2. Data Center
3. Device Connection

Specification

Cable Parameter			
Item		Specification	
Fiber Count		2	4
Sub-unit Jacket	Material	LSZH	
	Thickness	0.4mm±0.05mm	
	OD	2.0mm±0.2mm	
Armored Layer	Material	SUS204	
	OD	4.8mm±0.3mm	6.0mm±0.3mm
	Thickness	0.4mm±0.05mm	
	Gap	0.3mm±0.10mm	
Strength Member		Aramid Yarn	
Outer Jacket	Material	LSZH	
	Color	Black	
	Thickness	0.9mm±0.1mm	1.1mm±0.1mm
	OD	7.0mm±0.3mm	7.5mm±0.1mm 8.0mm±0.1mm

Mechanical and Environmental Characteristics			
Item		Specification	
Fiber Count		2	4
Tension Resistance (N)	Long Term	≥ 600	≥ 800
	Short Term	≥ 1000	≥ 1200
Crush Resistance (N/10cm)		≥ 3000	
Nominal Weight (kg/km)		65	85
Operating Temperature (°C)		-40 ~ +80	
Storage Temperature (°C)		-40 ~ +80	

Fiber Parameters					
Single Mode					
Item		Unit	G652D	G657A1	G657A2
Mode Field Diameter	1310nm	μm	9.1±0.4	8.8±0.4	8.8±0.4
	1550nm	μm	10.4±0.5	9.8±0.5	9.8±0.5
Cladding Diameter		μm	125±1	125±0.7	125±0.7
Cladding Non-circularity		%	≤ 1	≤ 0.7	≤ 0.7
Core-cladding Concentricity Error		μm	≤ 0.6	≤ 0.5	≤ 0.5
Coating Diameter		μm	245±7	245±5	245±5
Coating Non-circularity		%	≤ 6.0	≤ 6.0	≤ 6.0
Cladding-coating Concentricity Error		μm	≤ 12.0	≤ 12.0	≤ 12.0
Cable Cutoff Wavelength		nm	≤ 1260	≤ 1260	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤ 0.4	≤ 0.4	≤ 0.4
	1550nm	dB/km	≤ 0.3	≤ 0.3	≤ 0.3

Multimode						
Item	Unit	62.5/125	50/125	OM3-150	OM3-300	OM4
Core Diameter	μm	62.5±2.5	50±2.5	50±2.5	50±2.5	50±2.5
Cladding Diameter	μm	125±1.0	125±1.0	125±1.0	125±1.0	125±1.0
Core Non-circularity	%	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0
Cladding Non-circularity	%	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Core-cladding Concentricity Error	μm	≤ 1.5	≤ 1.5	≤ 1.0	≤ 1.0	≤ 1.0
Coating Diameter	μm	245±7	245±7	245±7	245±7	245±7
Coating Non-circularity	%	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0

Cladding-coating Concentricity		μm	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0
OFL Bandwidth	850nm	MHz·km	≥ 160	≥ 500	≥ 700	≥ 1500	≥ 3500
	1310nm	MHz·km	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500
Attenuation Coefficient	850nm	dB/km	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0
	1310nm	dB/km	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0

FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



FIBERMANIA Shenzhen FiberMania Technology Co., Ltd.



17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116