


144 Core Optical Fiber Cables , GYTA53 Double Sheathed Cable

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: ISO, UL, CE, RoHS
- Model Number: GYTA53-C-F-E (C=Cores, F=Fiber Mode, E=PE Jacket)
- Minimum Order Quantity: 1-2km
- Price: Negotiable
- Packaging Details: Wooden Drum
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 1000 Pieces

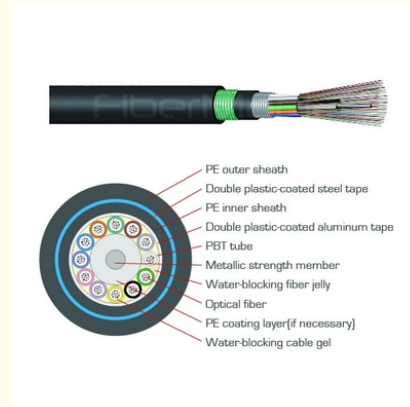

Product Specification

- Core: 144 Core
- Fiber Type: Single Mode
- Cable Structure: Round
- Jacket Material: Black Polyethylene (PE)
- Applications: Communication
- Cable Length: Customized
- Fiber Brand: Yofc/Ofs/Corning
- Operating Temperature: -40°C~+80°C
- Name: Optical Fiber Cable
- Highlight: **ISO Optical Fiber Cables,
144 Core Optical Fiber Cables,
GYTA53 Double Sheathed Cable**



More Images




for more products please visit us on optical-fibercables.com

Product Description

GYTA53 Double Sheathed and Double Armored Outdoor Optical Fiber Cable

Fiber optic cable GYTA53, 2~144 fibers, central strength member (steel), jelly-filled, fiber contained loose tube and PP filler (if necessary) stranded, water blocking jelly, copolymer coated aluminum tape, PE inner sheath, longitudinally covered by copolymer coated steel tape, PE outer sheath. G652D SM fiber. GYTA53 Double Sheathed and Double Armored Outdoor Optical Fiber Cable is a type of cable used in outdoor environments. This cable has two layers of sheaths, with the outer sheath providing additional protection and effectively resisting external environmental influences such as moisture, chemicals, and mechanical damage. And there are two layers of armor inside the optical cable (usually steel or aluminum tape), which provides stronger resistance to pressure and mechanical damage, ensuring the stability and durability of the optical cable when laid on the ground or buried underground. Single mode fiber or multimode fiber is usually used, suitable for long-distance fiber optic communication.

we manufactures a wide range of cables from 2-144fibers with a variety of designs to meet the demands of most installation conditions. Only the highest quality materials are used in our fiber optic cables to ensure that the cable strength and optical integrity are not compromised. Rugged jacket materials and the addition of armor provide the right level of protection.

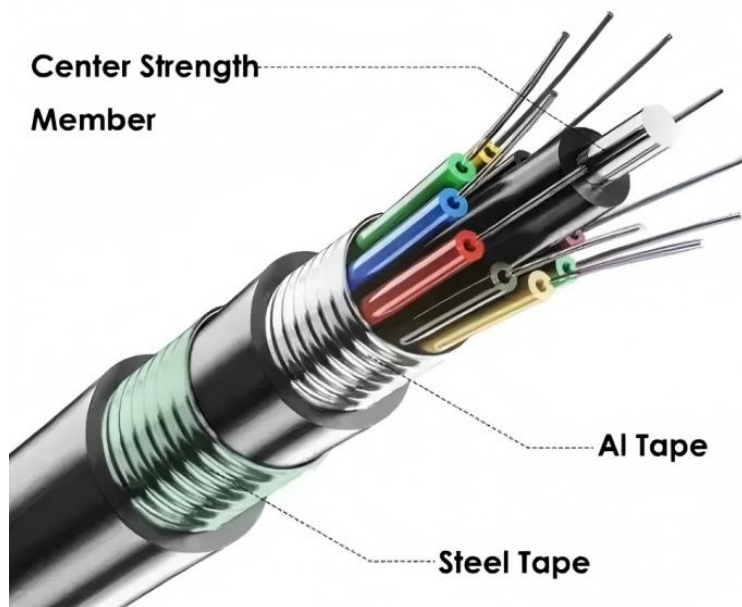


Features

1. Good mechanical and temperature performance
2. High strength loose tube that is hydrolysis resistant
3. Special tube filling compounds ensure a critical protection of fiber
4. Crush resistance and flexibility
5. The following measures are taken to ensure the cable is watertight
6. Steel wire used as the central strength member
7. Loose tube filling compound and 100% cable core filling
8. APL moisture barrier
9. PSP enhancing moisture-proof
10. Water-blocking material

Application

1. Adopted to outdoor distribution;
2. Suitable for aerial, pipeline laying method;
3. Long distance and local area network communication.



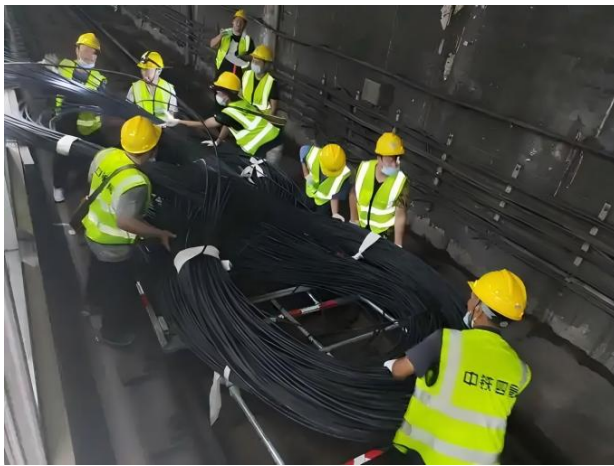

Specification

Cable Parameter			
Item		Specification	
Fiber Count		2	4
Sub-unit Jacket	Material	LSZH	
	Thickness	0.4mm±0.05mm	
	OD	2.0mm±0.2mm	
Armored Layer	Material	SUS204	
	OD	4.8mm±0.3mm	6.0mm±0.3mm
	Thickness	0.4mm±0.05mm	
	Gap	0.3mm±0.10mm	
Strength Member		Aramid Yarn	
Outer Jacket	Material	LSZH	
	Color	Black	
	Thickness	0.9mm±0.1mm	1.1mm±0.1mm
	OD	7.0mm±0.3mm	7.5mm±0.1mm 8.0mm±0.1mm

Mechanical and Environmental Characteristics			
Item		Specification	
Fiber Count		2	4
Tension Resistance (N)	Long Term	≥ 600	≥ 800
	Short Term	≥ 1000	≥ 1200
Crush Resistance (N/10cm)		≥ 3000	
Nominal Weight (kg/km)		65	85
Operating Temperature (°C)		-40 ~ +80	
Storage Temperature (°C)		-40 ~ +80	

Fiber Parameters					
Single Mode					
Item		Unit	G652D	G657A1	G657A2
Mode Field Diameter	1310nm	μm	9.1±0.4	8.8±0.4	8.8±0.4
	1550nm	μm	10.4±0.5	9.8±0.5	9.8±0.5
Cladding Diameter		μm	125±1	125±0.7	125±0.7
Cladding Non-circularity		%	≤ 1	≤ 0.7	≤ 0.7
Core-cladding Concentricity Error		μm	≤ 0.6	≤ 0.5	≤ 0.5
Coating Diameter		μm	245±7	245±5	245±5
Coating Non-circularity		%	≤ 6.0	≤ 6.0	≤ 6.0
Cladding-coating Concentricity Error		μm	≤ 12.0	≤ 12.0	≤ 12.0
Cable Cutoff Wavelength		nm	≤ 1260	≤ 1260	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤ 0.4	≤ 0.4	≤ 0.4
	1550nm	dB/km	≤ 0.3	≤ 0.3	≤ 0.3

Multimode						
Item	Unit	62.5/125	50/125	OM3-150	OM3-300	OM4
Core Diameter	μm	62.5±2.5	50±2.5	50±2.5	50±2.5	50±2.5
Cladding Diameter	μm	125±1.0	125±1.0	125±1.0	125±1.0	125±1.0
Core Non-circularity	%	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0	≤ 5.0
Cladding Non-circularity	%	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0
Core-cladding Concentricity Error	μm	≤ 1.5	≤ 1.5	≤ 1.0	≤ 1.0	≤ 1.0
Coating Diameter	μm	245±7	245±7	245±7	245±7	245±7
Coating Non-circularity	%	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0	≤ 6.0
Cladding-coating Concentricity	μm	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0	≤ 12.0

OFL Bandwidth	850nm	MHz·km	≥ 160	≥ 500	≥ 700	≥ 1500	≥ 3500
	1310nm	MHz·km	≥ 500	≥ 500	≥ 500	≥ 500	≥ 500
Attenuation Coefficient	850nm	dB/km	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0	≤ 3.0
	1310nm	dB/km	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0	≤ 1.0



FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



FIBERMANIA **Shenzhen FiberMania Technology Co., Ltd.**



17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116