

GYTC8S Figure 8 Fiber Optic Cable Self Supporting Armored 36 Core

Basic Information

Place of Origin: Shenzhen, China
Brand Name: FIBERMANIA
Certification: ISO, UL, CE, RoHS

• Model Number: GYTC8S-C-F-E (C=Cores, F=Fiber Mode,

E=PE Jacket)

Minimum Order Quantity: 1-2km
Price: Negotiable
Packaging Details: Wooden Drum

Payment Terms: T/T, Western Union, L/C

• Supply Ability: 1000 Pieces



Product Specification

• Name: Figure 8 Fiber Optic Cable

Fiber Type: Single ModeCore: 36 CoreCable Structure: Round

• Jacket Material: Black Polyethylene (PE)

Applications: Base Station
Cable Length: Customized
Fiber Brand: Yofc/Ofs/Corning
Operating Temperature: -40°c~+80°c

Highlight: GYTC8S Figure 8 Fiber Optic Cable,
Figure 8 Fiber Optic Cable Self Supporting,

Figure 8 Optical Fiber Cable 36 Core



More Images






Product Description

GYTC8S Figure 8 Self-supporting Armored Outdoor Optical Fiber Cable

GYTC8S fiber optic cable is a typical outdoor use self-supported fiber cable for aerial applications. It's also called the figure 8 cable because its structure looks like figure 8. Fiber optic cable GYTC8S, 2~144 fibers, central strength member (steel), jelly-filled, fiber contained loose tube and PP filler (if necessary) stranded, water blocking jelly, longitudinally covered by copolymer coated steel tape, PE outer sheath, fig 8 type, the suspension line (1.2×3=3.6mm), 7 steel wires stranded together. G652D SM fiber.

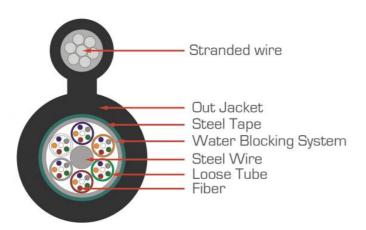

Features

- 1. Good mechanical and temperature performance.
- 2. High strength loose tube that is hydrolysis resistant.
- 3. Special tube filling compounds ensure a critical protection of fiber.
- 4. Crush resistance and flexibility.
- 5. PE sheath protects the cable from ultraviolet radiation.

Application

- Adopted to outdoor distribution;
- 2. Suitable for aerial, pipeline laying method;
- 3. Long distance and local area network communication.



Specification

No. of fibers	6	12	24	48	72	96	144
No. of tubes	1	1	2	4	6	8	12
fibers per tube	6	6	6	12	12	12	12

Filler Rod	4	3	1	1	0	0	0		
Tube diameter (±0.1mm)	2	2	2	2	2	2	2		
The thickness of loose tube(±0.05mm)	0.3	0.3	0.3	0.3	0.3	0.3	0.3		
Outer diameter (±0.5mm)	5.4X8.6	5.4X8.6	5.4X8.6	5.4X9.8	5.4X10.8	5.4X12.2	5.4X14.9		
	-15	-15	-15	-16.5	-17.5	-19	-22		
The thickness of outer diameter(±0.1mm)	1.6	1.6	1.6	1.6	1.6	1.7	1.7		
Loose tube	Material	PBT			Color	Standard spectrum			
Water blocking system	Material	Water blocking tape / Filling gel							
Armor	Material	Corrugated steel tape							
Central strength member	Material	Steel wire			Size	1.4mm(6-48)			
						2.0mm(72-144)			
Mental strength member	Material	Stranded steel wire			Size	1.0mm*7			
Gallus	Material	PE			Size(h*w)	2.0*1.5mm			
Outsheath	Material	PE			Color	Black			

Packaging & Shipping





FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



