


GYXTW Central Loose Tube Outdoor Optical Fiber Cable Single Mode 12 Core

Our Product Introduction

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: ISO, UL, CE, RoHS
- Model Number: GYXTW-C-F-E (C=Cores, F=Fiber Mode, E=PE Jacket)
- Minimum Order Quantity: 1-2km
- Price: Negotiable
- Packaging Details: Wooden Drum
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 1000 Pieces

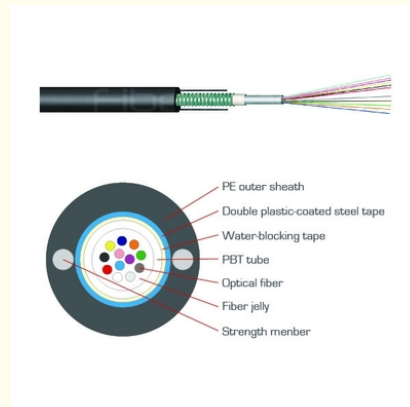

Product Specification

- Name: Outdoor Optical Fiber Cable
- Fiber Type: Single Mode
- Cable Structure: Round
- Jacket Material: Black Polyethylene (PE)
- Applications: Base Station
- Cable Length: Customized
- Core: 12 Core
- Fiber Brand: Yofc/Ofs/Corning
- Operating Temperature: -40°C~+80°C
- Highlight: **Outdoor Optical Fiber Cable Single Mode, Outdoor Optical Fiber Cable 12 Core, 12 Core Single Mode Fiber Optic Cable**



More Images




for more products please visit us on optical-fibercables.com

Product Description

GYXTW Central Loose Tube Outdoor Optical Fiber Cable

GYXTW is an outdoor optical fiber cable suitable for duct and aerial applications. FiberMania supplies GYXTW fiber cable from 2 fiber cores to 24 fiber cores. Available in both Single-Mode and Multimode types. Fiber optic cable GYXTW, 2~12 fibers, jelly-filled and fiber contained central loose tube, copolymer coated steel tape, two parallel steel wires 1.2mm, PE outer sheath, G652D SM fiber.

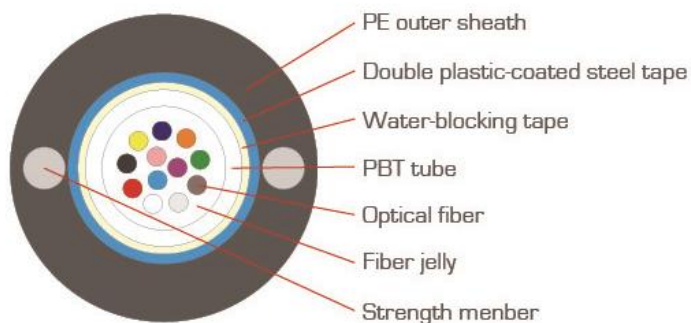

Features

1. Good tensile strength and crush.
2. Resistance performance.
3. Good moisture-resistance, water blocking, and flexibility.
4. Double wire as strength member provides excellent strain performance.

Application

1. Adopted to outdoor distribution;
2. Suitable for aerial, pipeline laying method;
3. Long distance and local area network communication.

Specification

Core	Cable diameter	Weight
1~24	8.0mm±0.3mm	65kg/km±10kg
Temperature range	30	—
Min Bending Radius(mm)	Long term	10D
Min Bending Radius(mm)	Short term	20D
Min allowable Tensile Strength(N)	Long term	1200
Min allowable Tensile Strength(N)	Short term	1500
Operation Temperature (°C)	30	
Installation Temperature(°C)	40	
Storage Temperature(°C)	30	





FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



FIBERMANIA Shenzhen FiberMania Technology Co., Ltd.



17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116