

LC UPC 6 Cores PVC Bundle Fan Out Fiber Optic Cable Multimode OM1 Orange Jacket

Basic Information

Place of Origin: Shenzhen, ChinaBrand Name: FiberMania

Certification: ISO, UL, CE, RoHS
 Model Number: FP-6LCMM6-3
 Minimum Order Quantity: 10 Pieces
 Price: Negotiable

Packaging Details:
 PE bag or OEM service optional

• Delivery Time: 5 days

Payment Terms: T/T, Western Union, L/CSupply Ability: 10000 Pieces per day



Product Specification

• Name: Fan Out Fiber Optic Cable

Connector A: LC/UPC
 Connector B: Unterminated
 Fiber Mode: OM1 62.5/125µm

Cable (OD): 7.5mm
 Cable Jacket: PVC
 Jacket Color: Orange
 Insertion Loss: ≤0.2dB
 Return Loss: ≥35dB

Highlight: PVC Bundle Fan Out Fiber Optic Cable,
 Fan Out Fiber Optic Cable Multimode,

6 Cores Fan Out Fiber Optic Cable Multimode,



Product Description

LC/UPC 6 Cores Bundle Fan-out Fiber Optic Pigtail Multimode 62.5/125um Orange Jacket

A fiber pigtail is a great solution for fusion splicing inside of a fiber patch panel or fiber optic patch panel. Each strand is terminated on one end and the other end is left blunt so that it can be spliced to your drop cable to eliminate the need for annoying field terminations and save time. FiberMania manufactures a full line of fiber optic pigtails, including simplex, duplex, 4 fibers, 6 fibers, 12 fibers, 24 fibers, 48 fibers, and so on. The multi-strand pigtails we supplied are packed with a good blister to guarantee the fiber is not easily broken. Each fiber strand in the kit has a color-coded buffer for easy identification and the colors are industry standard.

Applications


- 1. CATV, LAN, WAN
- 2. Test and measurement
- 3. Telecommunication networks
- 4. Premise installations
- 5. Video and military active device termination


Features

- 1. Low insertion loss and back reflection loss
- 2. Good exchangeability and good durability
- 3. Meets ISO9001, ROHS, and Bell core GR 326-core standards
- 4. Available in 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers

Specifications

Characteristics	Standard Fiber Cable Assemblies	
Fiber Count	6	
Fiber Grade	Bend Insensitive	
Ferrule Materials	Zirconia Ceramic	
Fiber Type	OM1 62.5/125 μm	
Testing Wavelength	850/1300 nm	
Durability	1000 Times	
Min. Bend Radius(Fiber Cable)	20/10D (Dynamic/Static)	
Interchangeability	≤0.2 dB	
Vibration	≤0.2 dB	
Operating Temp. (C)	-20°C ~+70°C	
Storage Temp. (°C)	-40°C ~ +85°C	

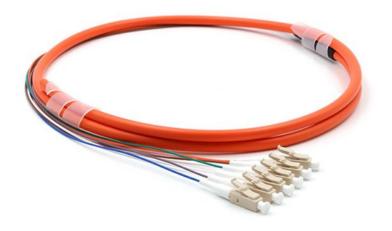

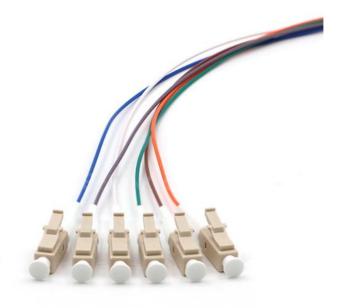

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.





17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116