


LC UPC 12 Cores PVC Bundle Fan Out Fiber Optic Pigtail Multimode OM3 Aqua Jacket

Our Product Introduction

for more products please visit us on optical-fibercables.com

Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FiberMania
- Certification: ISO, UL, CE, RoHS
- Model Number: FP-12LCMM3-3
- Minimum Order Quantity: 10 Pieces
- Price: Negotiable
- Packaging Details: PE bag or OEM service optional
- Delivery Time: 5 days
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 10000 Pieces per day

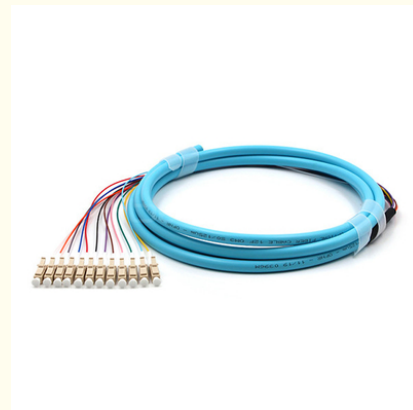

Product Specification

- Name: Fiber Optic Pigtail Multimode
- Connector A: LC/UPC
- Connector B: Unterminated
- Fiber Mode: OM3 50/125μm
- Cable (OD): 7.5mm
- Cable Jacket: PVC
- Jacket Color: Aqua
- Insertion Loss: ≤0.2dB
- Return Loss: ≥35dB
- Highlight: **Fiber Optic Pigtail Multimode, Multimode Fiber Pigtail**



Product Description

LC UPC 12 Cores PVC Bundle Fan-Out Fiber Optic Pigtail Multimode OM3 Aqua Jacket

A fiber pigtail is a great solution for fusion splicing inside of a fiber patch panel or fiber optic patch panel. Each strand is terminated on one end and the other end is left blunt so that it can be spliced to your drop cable to eliminate the need for annoying field terminations and save time. FiberMania manufactures a full line of fiber optic pigtails, including simplex, duplex, 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers, 48 fibers, and so on. The multi-strand pigtails we supplied are packed with a good blister to guarantee the fiber is not easily broken. Each fiber strand in the kit has a color-coded buffer for easy identification and the colors are industry standard.

Applications

1. CATV, LAN, WAN
2. Test and measurement
3. Telecommunication networks
4. Premise installations
5. Video and military active device termination


Features

1. Low insertion loss and back reflection loss
2. Good exchangeability and good durability
3. Meets ISO9001, ROHS, and Bell core GR 326-core standards
4. Available in 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers

Specifications

Characteristics	Standard Fiber Cable Assemblies
Fiber Count	12
Fiber Grade	Bend Insensitive
Ferrule Materials	Zirconia Ceramic
Fiber Type	OM3 50/125 μ m
Testing Wavelength	850/1300 nm
Durability	1000 Times
Min. Bend Radius(Fiber Cable)	20/10D (Dynamic/Static)
Interchangeability	≤ 0.2 dB
Vibration	≤ 0.2 dB
Operating Temp. (C)	-20°C ~ +70°C
Storage Temp. (°C)	-40°C ~ +85°C



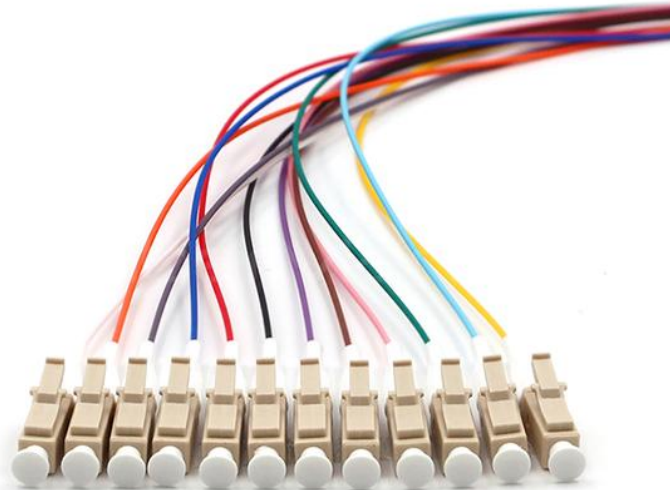

FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.


Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.

 **FIBERMANIA** **Shenzhen FiberMania Technology Co., Ltd.**

 17704025189

 sales@fiber-mania.com

 optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116