

# SC UPC 6 Cores PVC Bundle Fan Out Fiber Optic Cable Pigtail Multimode OM3 Aqua Jacket

## **Basic Information**

Place of Origin: Shenzhen, ChinaBrand Name: FiberMania

Certification: ISO, UL, CE, RoHS
Model Number: FP-6SCMM3-3
Minimum Order Quantity: 10 Pieces
Price: Negotiable

Packaging Details:
PE bag or OEM service optional

• Delivery Time: 5 days

Payment Terms: T/T, Western Union, L/CSupply Ability: 10000 Pieces per day



# **Product Specification**

Connector A: SC/UPCConnector B: Unterminated


• Fiber Mode: OM3 50/125µm

Cable (OD): 6.0mm
Cable Jacket: PVC
Jacket Color: Aqua
Insertion Loss: ≤0.2dB
Return Loss: ≥35dB

Name: Fiber Optic Pigtail

• Highlight: 6 Cores Fiber Optic Cable Pigtail,

Fan Out Fiber Optic Cable Pigtail, Fiber Optic Cable Pigtail ultimode



# More Images



## **Product Description**

#### SC UPC 6 Cores PVC Bundle Fan-out Fiber Optic Pigtail Multimode OM3 Aqua Jacket

SC UPC 6 Cores PVC Bundle Fan-out Fiber Optic Pigtail Multimode OM3 Aqua Jacket is an important component for connecting fiber optic equipment, mainly used for the transmission and connection of optical signals. This fiber optic pigtail contains 6 fibers, with one end of the tail fiber connected with SCUPC connector, integrating multiple fibers, and connecting signals to multiple ports through a splitter. The outer sheath is made of PVC material, and the optical fibers are arranged in bundles for easy installation and management. This pigtail uses multimode OM3 optical fiber, supports multimode transmission, suitable for short distance data transmission, and is commonly used in local area networks (LANs) and data centers.

#### **Applications**


- 1. CATV, LAN, WAN
- 2. Test and measurement
- 3. Telecommunication networks
- 4. Premise installations
- 5. Video and military active device termination

#### **Features**

- 1. Low insertion loss and back reflection loss
- 2. Good exchangeability and good durability
- 3. Meets ISO9001, ROHS, and Bell core GR 326-core standards
- 4. Available in 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers

#### **Specifications**

Characteristics	Standard Fiber Cable Assemblies	
Fiber Count	6	
Fiber Grade	Bend Insensitive	
Ferrule Materials	Zirconia Ceramic	
Fiber Type	OM3 50/125 μm	
Testing Wavelength	850/1300 nm	
Durability	1000 Times	
Min. Bend Radius(Fiber Cable)	20/10D (Dynamic/Static)	
Interchangeability	≤0.2 dB	
Vibration	≤0.2 dB	
Operating Temp. (C)	-20°C ~+70°C	
Storage Temp. (°C)	-40°C ~ +85°C	

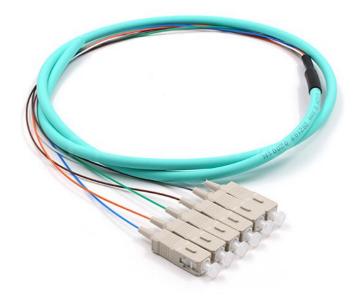



Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.





17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116