LC UPC To LC UPC Uniboot Patch Cord Single Mode OS2 OFNR Fiber Cable

Basic Information

- Place of Origin:
- Brand Name:
- Certification:
- Model Number:
- Minimum Order Quantity:
- Price:
- Packaging Details:
- Delivery Time:
- Payment Terms: T/T, Wes
- Supply Ability:
- 10 Pieces Negotiable

Shenzhen, China

ISO, UL, CE, RoHS

LCULCU-SM022RYL

FiberMania

- PE bag or OEM service optional
- 5 days
- T/T, Western Union, L/C
- 10000 Pieces per day



Product Specification

- Connector A:
- Connector B:
- Fiber Mode:
- Cable (OD):
- Cable Jacket:
- Jacket Color:
- Insertion Loss:
- Return Loss:
- Name:
- Highlight:
- LC/UPC Uniboot LC/UPC Uniboot OS2 9/125µm 2.0mm OFNR Yellow ≤0.2dB ≥50dB Fiber Optic Patch Cable
- Uniboot Patch Cord, LC UPC Patch Cord Single Mode, OFNR Fiber Cable



Ę٦

Product Description

This high-speed Single Mode 9/125µm duplex fiber optic patch cable is terminated with LC UPC uniboot connectors on both ends (LC/UPC-LC/UPC). The Uniboot design of connector enables two fibers to be carried by one jacket, which is easy to install and wire because of its small size, improving airflow and cable management in tight spaces. This single mode patch cables with LC uniboot connectors are widely used in data centers, telecommunications, desktop and network applications due to their compact design, space savings, and easy management and maintenance.


Applications of Fiber Optic Patch Cable

- 1. Data centers
- 2. Ethernet applications
- 3. FTTH applications
- 4. FTTD applications
- 5. Video, data and voice services 6. Test equipment applications

Features of Fiber Optic Patch Cable

- 1. LC/UPC and LC/UPC uniboot connectors for easy installation
- 2. Duplex Fiber in one jacket
- 3. High Speed, Single Mode
- 4. Polarity reversibility
- 5. Better signal transmission and cable management
- 6. UL, RoHS materials compliant

Specifications of Fiber Optic Patch Cable Characteristics Standard Fiber Cable Assemblies Connector Type LC to LC Polish Type UPC to UPC Ferrule Materials Zirconia Ceramic Fiber Type Single Mode(G.657A1) Testing Wavelength 1310/1550nm Min. Bend Radius(Fiber Core) 10mm Min. Bend Radius(Fiber Cable) 10/5D (Dynamic/Static) Exchangeability ≤0.2dB Attenuation at 1310 nm 0.36dB/km Attenuation at 1550 nm 0.22dB/km Polarity A (Tx) to B (Rx) Operating Temp. (C) -20°C ~+70°C -40°C ~ +85°C Storage Temp. (°C)

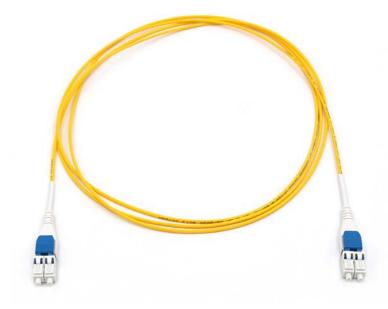

FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.

FIBERMANIA Shenzhen FiberMania Technology Co., Ltd.
S 17704025189 Sales@fiber-mania.com Optical-fibercables.com
3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116