

SC APC To SC APC Adapter, Green Single Mode Duplex Fiber Adapter

Basic Information

Place of Origin: Shenzhen, China
Brand Name: FIBERMANIA
Certification: ISO, UL, CE, RoHS
Model Number: SCASCASDPF
Minimum Order Quantity: 10 Pieces
Price: Negotiable

Packaging Details: Plastic Container + Carton
 Delivery Time: 7-10 working days
 Payment Terms: T/T, Western Union, L/C

100000PCS/Month



Product Specification

. Supply Ability:

Name: SC APC To SC APC Adapter

Flammability Rate: UL 94V-0
Connector Type: SC To SC
Color: Green
Body Style: Duplex
Polish Type: APC

Fiber Mode: OS2 9/125μm
 Insertion Loss: ≤0.2dB
 Durability: 500 Times

Highlight: SC APC To SC APC Adapter,
 Crean Single Mode Fiber Adapter.

Green Single Mode Fiber Adapter, Single Mode Duplex Fiber Adapter



More Images



Product Description

SC APC To SC APC Single Mode Duplex Plastic Flangeless Fiber Optic Adapter – Green

Fiber optic adapters are essential components in a fiber optic network, used in patch panels or other outlets to connect two connectors. These adapters are available for all standard connector types in both singlemode and multimode configurations, including simplex and duplex versions. Our fiber optic adapters are manufactured using high-precision machinery, ensuring accurate alignment of connectors when plugged in. They are color-coded for easy identification of the adapter type. Additionally, we offer hybrid and various specialized fiber optic adapters, including bare, shuttered, and metal housing options.

Features

- 1. SC Duplex & LC duplex adapter footprint
- 2. Without flange
- 3. Ideal for high-density packaging
- 4. No dust cap required for front receptacle
- 5. Available in a variety of housing colors
- 6. Compatible with T&S UltraX Fiber Management Platform
- 7. Internal shutter touches no ferrule
- 8. IP5X dust protection


Application

- 1. Data center
- 2. Telecommunication networks
- 3. Premise installations
- 4. LAN and WAN
- 5. FTTX
- 6. Broadband network

Mechanical Specifications

Operating Temperature	-40 to +75º C
Storage Temperature:	-40 to +85° C
Temperature Cycling (61300-2-18)	-40 to +75° C, 40 cycles=0.2dB change
High temperature (61300-2-18)	70°c for 96Hrs, <0.4dB change
Damp Heat (61300-2-19)	40° C at 93%RH for 96 Hrs, <0.4dB change
Vibration-Mated Pair (61300-2-1)	10-55Hz, 1.5mm P to P <0.2dB change
Mating Durability (61300-2-2)	500 Mating Cycles, clean every 25, <0.2dB change



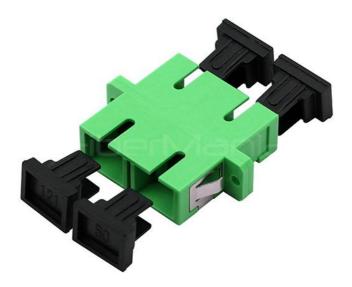

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Can this be used for multimode patch cable?

A: Yes, the can be used for the connection of multimode jumpers. The adapters distinguish in colors for connecting the corresponding cable when wiring.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.





17704025189



sales@fiber-mania.com



e optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116