


Networking CAT.3 RJ11 6P4C Toolless Keystone Jack White Color

Our Product Introduction

for more products please visit us on optical-fibercables.com


Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: CE, ISO, RoHS, UL
- Model Number: KJ-C3U64TWH
- Minimum Order Quantity: 100 Pieces
- Price: Negotiable
- Packaging Details: Polybag Into Carton
- Delivery Time: 10-20 working days

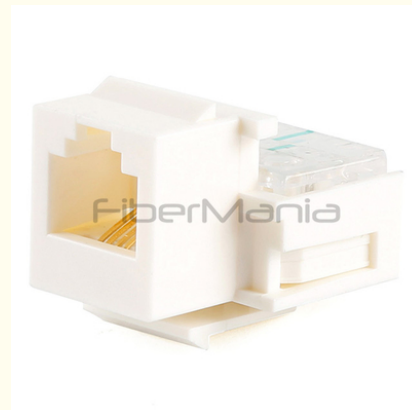


Product Specification

- Product Type: Cat3 Keystone Jack
- Connector: RJ11 Female
- Shielding Type: Unshielded
- Data Rate Support: 10 Mbps
- Conductor: 23-26AWG Cable
- Wiring Scheme: T568A/T568B
- Usage: Telephone, Computer, Server
- Highlight: **White Color Keystone Jack, 6P4C Keystone Jack, RJ11 Keystone Jack**

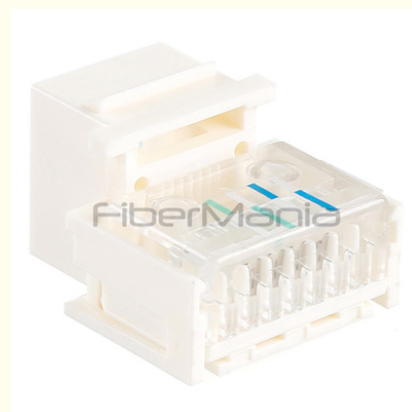

More Images

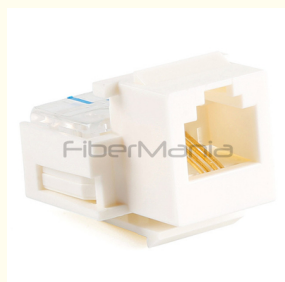


Product Description

Networking CAT.3 RJ11 6P4C Toolless Keystone Jack White Color

The CAT. 3 RJ11 6P4C Toolless Keystone Jack is a modular jack used in telecommunications networks, belonging to the CAT. 3 category of network jacks. It adopts the RJ11 interface and a configuration of 6P4C. During installation, there is no need to use specialized crimping tools. The cable can be directly inserted and fixed, making installation more convenient. It provides a transmission bandwidth of 16MHz and is suitable for basic telecommunications applications such as voice transmission. It can be widely used in telephone and network cabling systems in various places such as homes, offices, and shopping malls.

Features:

1. 50u" gold plated contacts.
 2. Utilizes 90 degree industry standard 110 termination style
 3. To be used with keystone wall plates or panels
 4. Wiring diagram on clip
 5. Toolless (no need for tools for punch down)
- Simply insert the leads following the color coding, and press down the lid.

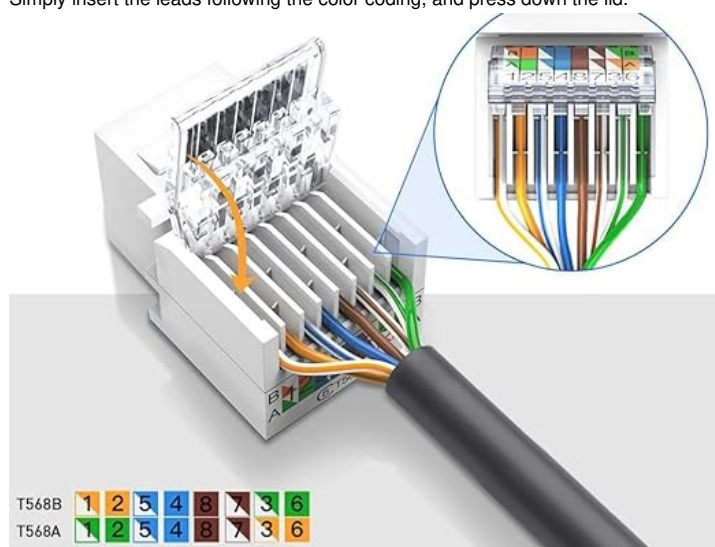

Applications:

1. Data center
2. Enterprise network cabling
3. FttH application

Specification:

Product Name	CAT.3/CAT.5e/CAT.6/CAT.6A/CAT.7/CAT.8 keystone jack
Product Color	Black, White, Silver, Blue, Yellow, Green, Red, Orange
Wiring Scheme	T568A/T568B
Housing Material	ABS/PC
Plating	3u inch, 6u inch, 10u inch, 15u inch, 20u inch, 30u inch, 50u inch
Working life	750 times Min for jack; 200times min for IDC
Humidity	10% ~ 90%RH
Temperature	-20°C~ 60°C
Voltage rating	125VCA RMS
Current rating	1.5Amp
Contact resistance	100 MILLIOHMS MAX
Insulation Resistance	1000 MEGOHMS MIN@500VDC
Certificate	ROHS

FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



FIBERMANIA Shenzhen FiberMania Technology Co., Ltd.



17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116