

SC APC 8 Cores Fiber Optic Pigtail Patch Cord Single Mode OS2 PE Black Jacket

Basic Information

Place of Origin: Shenzhen, ChinaBrand Name: FiberMania

Certification: ISO, UL, CE, RoHS
Model Number: FWP-8SASM9-1
Minimum Order Quantity: 10 Pieces
Price: Negotiable

Packaging Details:
PE bag or OEM service optional

• Delivery Time: 5 days

Payment Terms: T/T, Western Union, L/C
Supply Ability: 10000 Pieces per day



Product Specification

Connector A: SC/APCConnector B: Unterminated

• Fiber Mode: OS2 9/125µm

Cable (OD): 9.0mm
Cable Jacket: PE
Jacket Color: Black
Insertion Loss: ≤0.2dB
Return Loss: ≥60dB

Name: Fiber Optic Pigtail

Highlight: 8 Cores Fiber Optic Pigtail,

Fiber Optic Pigtail Patch Cord,

SC APC Fiber Pigtails



More Images







Product Description

SC APC 8 Cores Outdoor Waterproof Pigtail Single Mode OS2 PE Black Jacket

This fiber optic pigtail contains 8 fibers, with one end branching into a yellow single-mode optical cable with SCAPC connector. It has a high data transmission bandwidth and is suitable for high-density data centers and high-speed network environments. The outer sheath of the optical fiber is black PE, which is a plastic material with good chemical stability and high mechanical strength, suitable for outdoor use. And it can provide additional mechanical protection and waterproof performance, ensuring long-term durability and maintainability.

Applications

- 1. CATV, LAN, WAN
- 2. Test and measurement
- 3. Telecommunication networks
- 4. Premise installations
- 5. Video and military active device termination
- 6. Fiber optic patch panels and optical fiber distribution box


Features

- 1. Low insertion loss and back reflection loss
- 2. High bandwidth, high speed
- 3. Flexibility and durability
- 4. Available in 4 fibers, 6 fibers, 8 fibers, 12 fibers, 24 fibers

Specifications

Characteristics	Standard Fiber Cable Assemblies	
Fiber Count	8	
Fiber Grade	Bend Insensitive	
Ferrule Materials	Zirconia Ceramic	
Fiber Type	OS2 9/125 μm	
Testing Wavelength	1310/1550 nm	
Durability	1000 Times	
Min. Bend Radius(Fiber Cable)	20/10D (Dynamic/Static)	
Interchangeability	≤0.2 dB	
Vibration	≤0.2 dB	
Operating Temp. (C)	-20°C ~+70°C	
Storage Temp. (°C)	-40°C ~ +85°C	



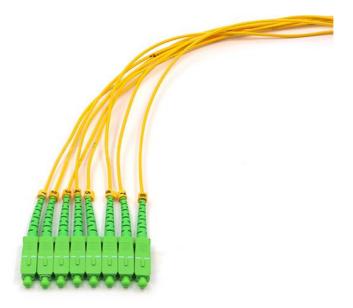

FAQ

Q1: What is the warranty of FiberMania's fiber patch cord?

A: FiberMania warrants that all fiber patch cords supplied are free from defects in material and workmanship for a period of five (5) years from the date of supply. All fiber optic bulk cables are UL profiled and every single cable is 100% tested.

Q2: Is it possible to customize our brand information on your fiber cable?

A: Yes, we can print your brand name onto our cable jacket and 1KM total cable length is requested.

Q3: Can you do 3D interferometer test?

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.





17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116