

## Steel Tube 900um 1X4 PLC Splitter With SC/UPC Fiber Connectors

Our Product Introduction

for more products please visit us on [optical-fibercables.com](http://optical-fibercables.com)

### Basic Information

- Place of Origin: Shenzhen, China
- Brand Name: FIBERMANIA
- Certification: CE, RoHS
- Model Number: PM104SUSU30
- Minimum Order Quantity: 10 Pieces
- Price: Negotiable
- Packaging Details: Inner Box Into Carton
- Payment Terms: T/T, Western Union, L/C
- Supply Ability: 1000 Pieces




### Product Specification

- Type: Fiber Optic Splitter&Coupler
- Wiring Devices: ODF
- Configuration Type: 1 X 4
- Fiber Grade: G.657A1
- Fiber Mode: Single Mode
- Fiber Diameter: 900μm
- Connector Type: SC/UPC
- Package Style: Mini Module
- Insertion Loss: ≤12.5dB
- Return Loss: ≥50dB
- Highlight: 900um PLC Splitter, SC/UPC PLC Splitter, 1X4 PLC Splitter



### More Images



## Product Description

### Steel Tube 900um 1X4 PLC Splitter With SC/UPC Fiber Connectors

Steel Tube 900um 1x4 PLC Splitter with SC/UPC Connectors is a passive optical device used in fiber optic networks to split a single input signal into four output signals with minimal loss. Its steel tube housing provides mechanical strength and protection against bending/crushing. 900um tight buffer offers better handling and durability compared to bare 250um fibers. Both of sides terminated with SC/UPC connectors ensure low insertion loss and high reliability. Its Compact design suitable for patch panels, splice closures, or ODFs.

#### Features


1. Compact Size
2. 900um Input and Output
3. Fan-out Type Available
4. Compact package Convenient for Small Application & High Density Areas
5. Steel tube for durability and protection
6. Bend Insensitive G657A fiber
7. Low insertion loss and high return loss

#### Applications

1. FTTx system, such as Fiber to the Home (FTTH).
2. Local Area Network (LAN), Wide Area Network (WAN), and Metropolitan Area Network.
3. Cable television network
4. Passive Optical Network

#### Specifications

Parameters	1×2	1×4	1×8	1×16	1×32	1×64
Operating Wavelength (nm)	1260~1650					
Fiber Type	SMF-28e or customer specified					
Insertion Loss (dB)(S/P Grade)	4.0/3.8	7.3/7.0	10.5/10.2	13.7/13.5	16.9/16.5	21.0/20.5
Loss Uniformity (dB)	0.4	0.6	0.8	1.2	1.5	2.5
Return Loss (dB) (S/P Grade)	50/55	50/55	50/55	50/55	50/55	50/55
Polarization Dependent Loss(dB)	0.2	0.2	0.3	0.3	0.3	4
Directivity (dB)	55	55	55	55	55	55
Wavelength Dependent Loss(dB)	0.3	0.3	0.3	0.5	0.5	0.5
Temperature Stability(-40~85 °C)(dB)	0.5	0.5	0.5	0.5	0.5	0.5
Operating Temperature (°C)	-40~85					
Storage Temperature (°C)	-40~85					

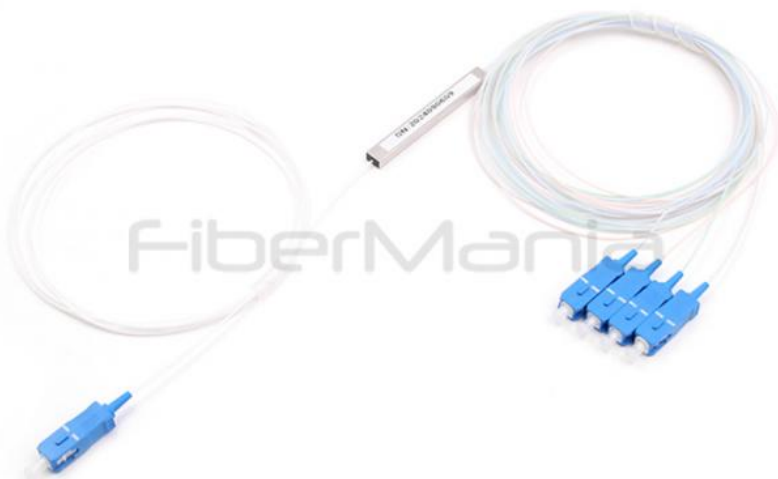

#### FAQ

Q1: Can you tell me how long the fibers are? I need fibers about 2 meters long.  
A: The default fiber is 1.5m. We can customize 2m long fiber and other length.

Q2: The 1x32 one is 1U, what about 1x64 and 1x128?

A: 1x64 is 1U, 1x128 is 2U.

Q3: Do you know what the limit in dBm is for the PLC I check the datasheet for this and it does not state the limit in dBm for the input and output ports of this splitter.

A: Yes, we do the 3D test per our customer's request, we can have the pass rate over 90% and even 100% if necessary.

Q4: What is your MOQ of your products?

A: We only have MOQ for some special customized cable order, we request 1km as the total length of the bulk cable, you may consider stock the bulk cable with us for your urgent order production.

Q5: Are free samples available from you?

A: Yes, we are always happy to offer the free samples for all of our customers' projects provided that the total cost is under 50 US dollars.

Q6: Do you accept OEM and ODM orders?

A: Absolutely yes, we have been doing OEM services since we start in this business, and for every single label, printing, bag and carton design, we always treat it seriously and do it nicely. Our engineers can help you with your current design and even can open the new tooling for your specific project.



**FIBERMANIA** Shenzhen FiberMania Technology Co., Ltd.



17704025189



sales@fiber-mania.com



optical-fibercables.com

3F, Building A2, Yinlong Industrial Park, Longdong, Longgang District, Shenzhen, China, 518116